


Image not found or type unknown

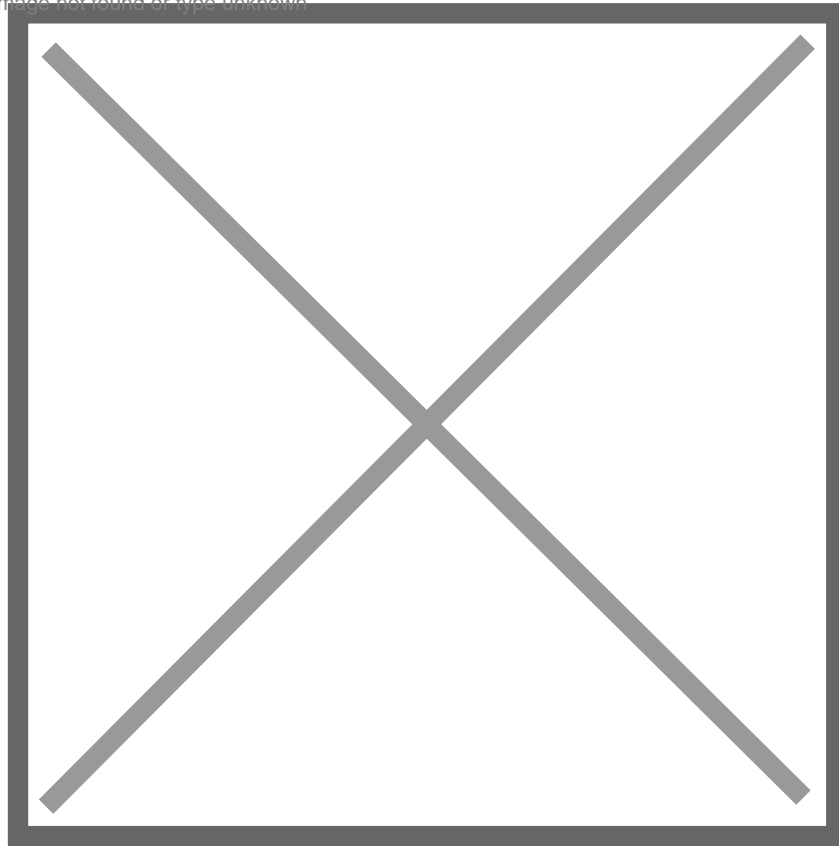

UNBALANCED SEAL - CS225H

Face Materials

- carbon, stellite, silicon carbide, tungsten carbide, lecolloy
- <https://www.cosmosseals.com/images/product-images/>

Metal Parts

- SS 316, SS 304

Secondary Seals

- Viton, EPDM, silicon, aflas, PTFE, GFT, karlez, FEP, TTV

Applications

- light abrasive slurry, light sewage water, hydrocarbons, high viscosity fluids, general & light chemicals

Operating Limits

- Shaft Diameter d_1 - 18? . 100mm, Pressure P : 25 bar (max), temperature t : -50? . +180 degree C, velocity v : 20m/sec