


Image not found or type unknown

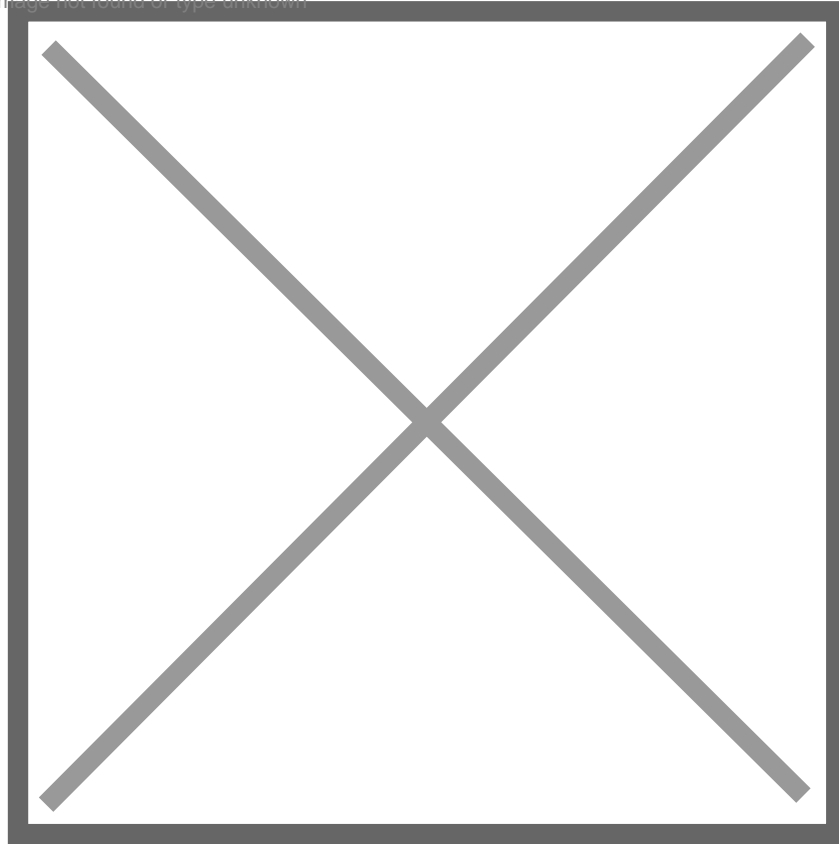

DOUBLE CARTRIDGE SEAL - CS5502C

Face Materials

- carbon, silicon carbide, tungsten carbide
- <https://www.cosmosseals.com/images/product-images/>

Metal Parts

- SS 316, SS 304

Secondary Seals

- Viton, EPDM, silicon, aflas, PTFE, GFT, karlez, FEP, TTV

Applications

- slurry pump, pulp & paper, sludge & syrup pump, chemical, petrochemical & refinery

Operating Limits

- Shaft Diameter d_1 - 18? . 100mm, Pressure P : 35 bar (max), temperature t : -20? . +300 degree C, velocity v : 20m/sec